


LED WALL WASHER INDOOR USER MANUAL

1. Details:

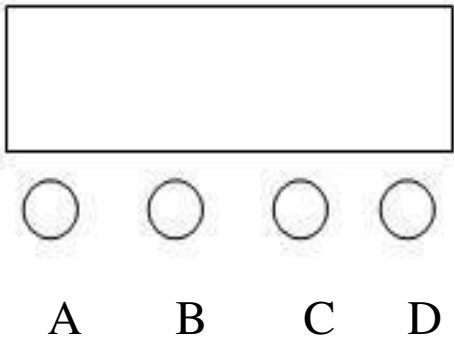

- A. Function key
- B. Plus
- C. Minus
- D. Enter
- E. LED Display

Instructions: Press Function Key A, there will be 8 different functions. First two digits shows the current function(refer to the function table below)。 Last two digits shows the address or speed parameter of the current function. Press B or C key to change the value, press D to enter and confirm.

2. LED Display function table, (Select the function and press D to enter)

Serial	Display	Function
1	Addr	A001-A512
2	CHnd	Channel option (4CH、7CH、72CH、76CH)
3	SLnd	Auto: Host self-propelled mode SL 1: Console mode SL 2: Slave mode
4	SH**	Host self-propelled effect selection(0-22)
5	Sped	Self-propelled speed adjustment (0-100)
6	SEnS	Voice control sensitivity adjustment(0-100)
7	r***	Red dimming (0-255)
8	G***	Green dimming (0-255)
9	b***	Blue dimming (0-255)
10	W***	White dimming (0-255)

11	LEd	OFF (Screen off after 5 seconds) ON (Screen on)
----	-----	--

3. DMX512

4 CH

Channel	Function	Detailed Function
1	Red dimming	0-255: R dimmer, linear dimmer, from dark to bright.
2	Green dimming	0-255: G dimmer, linear dimmer, from dark to bright.
3	Blue dimming	0-255: B dimmer, linear dimmer, from dark to bright.
4	White dimming	0-255: W dimmer, linear dimmer, from dark to bright.

8 CH

Channel	Function	Detailed Function
1	Total dimmer	R、G、B、W total dimmer, linear dimmer, from dark to bright.
2	Strobe	0-255: Strobe effect
3	Self-propelled mode	0-15: Default : 16-255: Auto run
4	Speed adjustment	0-255: From slow to fast
5	R Dimmer	0-255: R dimmer, linear dimmer, from dark to bright.
6	G Dimmer	0-255: G dimmer, linear dimmer, from dark to bright.
7	B Dimmer	0-255: B dimmer, linear dimmer, from dark to bright.
8	W Dimmer	0-255: W dimmer, linear dimmer, from dark to bright.

72 CH

Channel	Function	Detailed Function
1	R1Dimmer	0-255: R1 Dimmer, Linear dimmer from dark to bright
2	G1Dimmer	0-255: G1 Dimmer, Linear dimmer from dark to bright
3	B1Dimmer	0-255: B1 Dimmer, Linear dimmer from dark to bright
4	W1 Dimmer	0-255: W1 Dimmer, Linear dimmer from dark to bright
5	R2 Dimmer	0-255: R2 Dimmer, Linear dimmer from dark to bright
6	G2 Dimmer	0-255: G2 Dimmer, Linear dimmer from dark to bright
7	B2 Dimmer	0-255: B2 Dimmer, Linear dimmer from dark to bright
8	W2 Dimmer	0-255: W2 Dimmer, Linear dimmer from dark to bright
.....

69	R18 Dimmer	0-255: R18 Dimmer, Linear dimmer from dark to bright
70	G18 Dimmer	0-255: G18 Dimmer, Linear dimmer from dark to bright
71	B18 Dimmer	0-255: B18 Dimmer, Linear dimmer from dark to bright
72	W18 Dimmer	0-255: W18 Dimmer, Linear dimmer from dark to bright

76 CH

Channel	Function	Detailed Function
1	Total dimmer	R、G、B、W total dimmer, linear dimmer, from dark to bright.
2	Strobe	0-255: Strobe effect
3	Self-propelled mode	0-15: Default 16-255: Auto run
4	Speed adjustment	0-255: From slow to fast
5	R1 Dimmer	0-255: R1 Dimmer, Linear dimmer from dark to bright
6	G1 Dimmer	0-255: G1 Dimmer, Linear dimmer from dark to bright
7	B1 Dimmer	0-255: B1 Dimmer, Linear dimmer from dark to bright
8	W1 Dimmer	0-255: W1 Dimmer, Linear dimmer from dark to bright
9	R2 Dimmer	0-255: R2 Dimmer, Linear dimmer from dark to bright
10	G2 Dimmer	0-255: G2 Dimmer, Linear dimmer from dark to bright
11	B2 Dimmer	0-255: B2 Dimmer, Linear dimmer from dark to bright
12	W2 Dimmer	0-255: W2 Dimmer, Linear dimmer from dark to bright
.....
73	R18 Dimmer	0-255: R18 Dimmer, Linear dimmer from dark to bright
74	G18 Dimmer	0-255: G18 Dimmer, Linear dimmer from dark to bright
75	B18 Dimmer	0-255: B18 Dimmer, Linear dimmer from dark to bright
76	W18 Dimmer	0-255: W18 Dimmer, Linear dimmer from dark to bright